


# FLK 21


FOR FLOORS WITH PVC OR LINOLEUM

# MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS

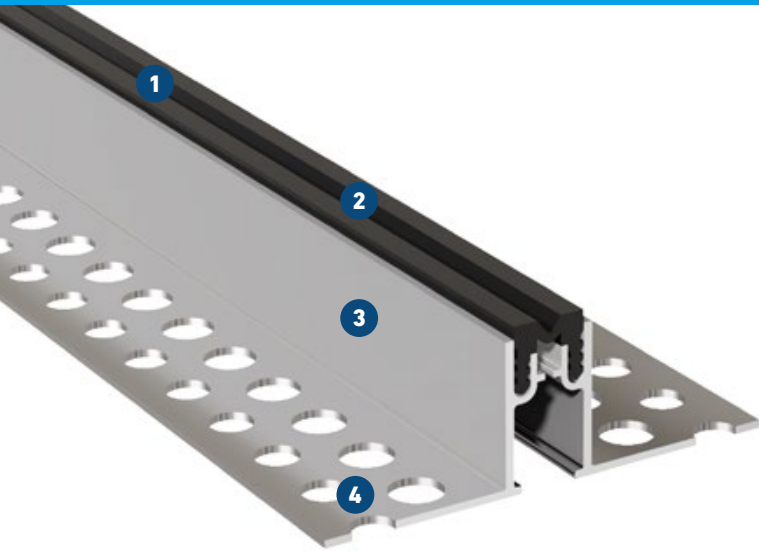

- 1 Flexible high quality elastomeric insert**  
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Multi directional movement**
- 3 Quick and easy installation**  
Solid, but light aluminium brackets for quick installation in floorings with PVC or linoleum coverings (insert with 3 mm upstand, weldable with PVC)
- 4 MultiHole mounting bracket**  
for secure fixing

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	for coverings	Load bearing capacity*
	$b_f \text{ max}$ [mm]	$\Delta b_f$ [mm]	$b_s$ [mm]	$b_t$ [mm]	$h$ [mm]	thickness [mm]	 [kN]
FLK 21/20	20	5 (+3/-2)	17	80	20	3	30
FLK 21/35	20	5 (+3/-2)	17	107	35	3	30
FLK 21/50	20	5 (+3/-2)	17	107	50	3	30

\* no continuous use

All info on load capacities apply to doweled, not to floating installation.

For installation in asphalt, please ask for our technical advice.

Expansion joint covers of series FLK 21 are supplied with flush mounted distance insert of FL 21. The top edge of the aluminium joint cover can be used as a screeding guide. The distance insert protects the expansion joint cover until covering is laid. This method avoids damage of joint cover caused by site traffic.

The expansion joint cover with the height of 20 mm has larger punched holes and is not suitable for dowelling.

**Production length:** 4 m

**Standard colour:** grey

**Wall connections:** E3, E4

